PLOT PLAN 1" = APPROX 60'

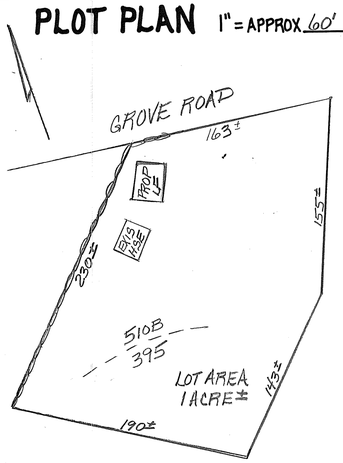

LOT CONFIGURATION APPROXIMATE

SOIL CLASS: 510B

SOURCE: USDA-SCS SOIL SURVEY

BENCH MARKS:

#1 100.0 ASSUMED SET NAIL 2' UP IN POLE

#2 SILL ELEV AT FRONT OF HSE ELEV 99.16

DESIGN INTENT:

BED BOTTOM TO BE PLACED 2½" BELOW EXISTING GRADE, UPSLOPE SIDE.

SUITABLE REPLACEMENT AREA:

IN PLACE OR REDESIGN

KEY:

_____ EXISTING CONTOUR

- - - - - - - - - - PROPOSED CONTOUR

100.0 EXISTING SPOT ELEVATION

(100.0) PROPOSED SPOT ELEVATION

(PROPOSED GRADING SHOWN ONLY AS IT PERTAINS TO SEPTIC SYSTEM DESIGN)

NOTES:

1. SUBDIVISION APPROVAL N/A EXIS LOT
2. THIS SYSTEM IS NOT DESIGNED TO HANDLE GARBAGE DISPOSAL WASTE.

LOCUS MAP NO SCALE



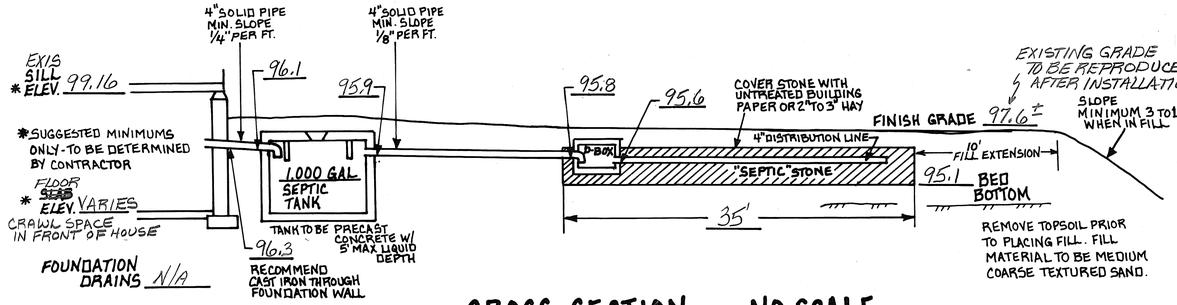

CROSS SECTION — NO SCALE

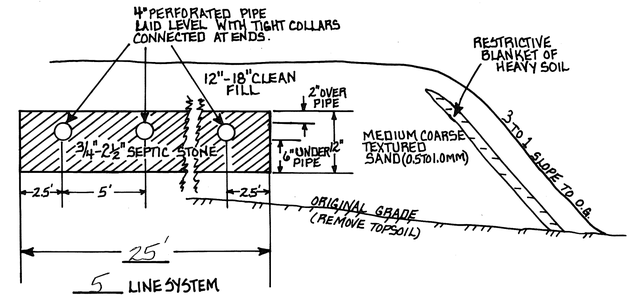

PLAN — 1" = 20'

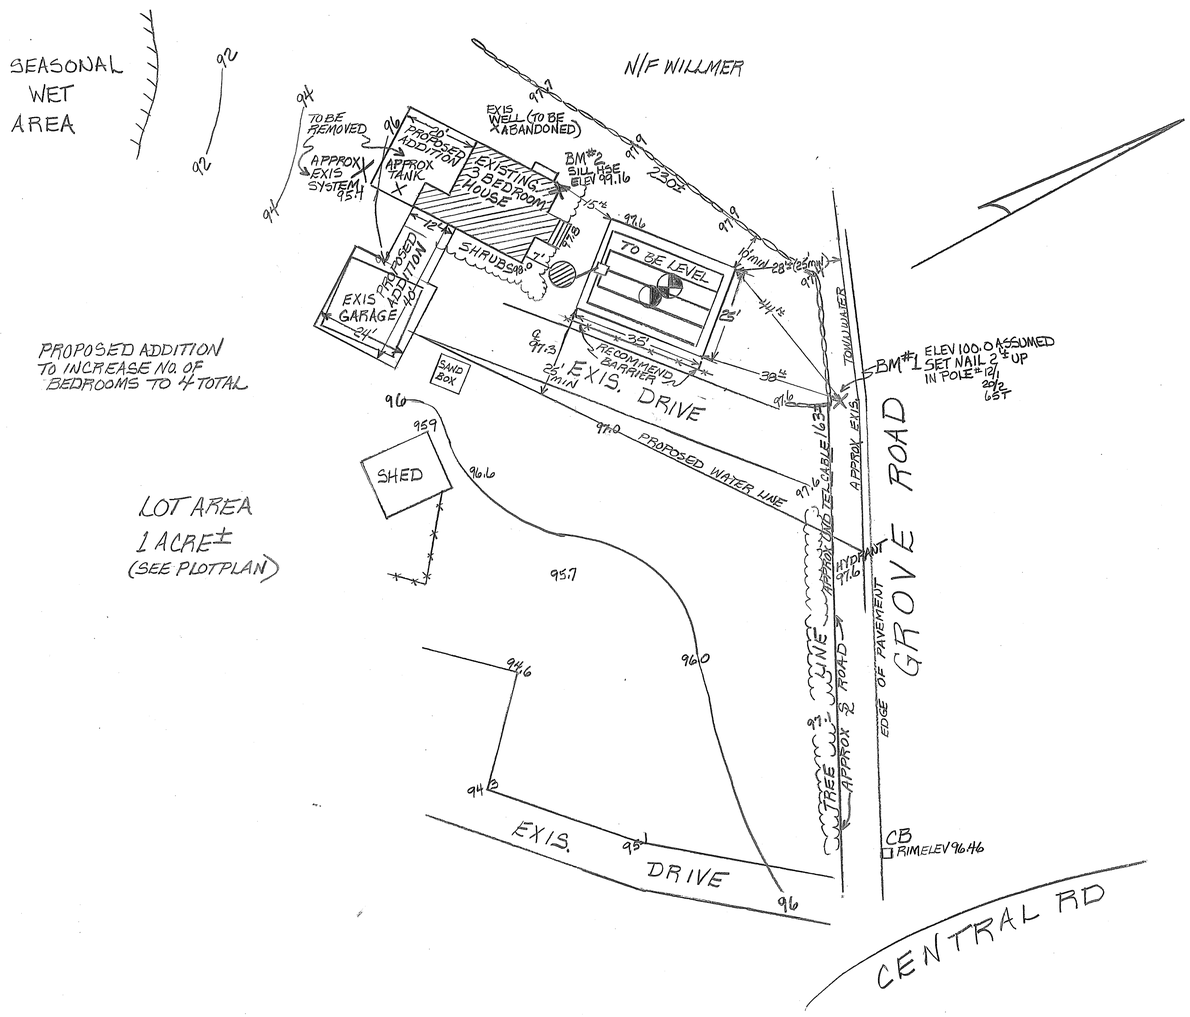

PROPOSED ADDITION TO INCREASE NO. OF BEDROOMS TO 4 TOTAL

LOT AREA 1 ACRE± (SEE PLOTPLAN)

TOWN INSPECTOR: JOE MAY

TEST PIT DATA DATE: 11/8/84

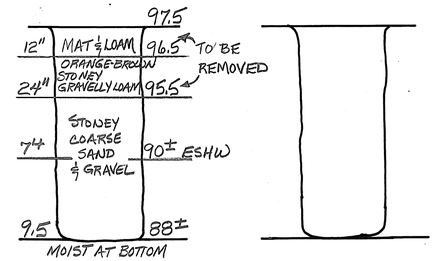

PERC TEST DATE: 11/8/84

DEPTH OF HOLE: 30"

RATE OF PERC: 2 MIN/IN

DESIGN LOADING: 4 BEDROOMS

AREA REQUIRED: 750 SQ. FT.

PROPOSED SYSTEM: 25 x 35 FOR 875 SQ. FT. AREA PROVIDED

PLAN OF PROPOSED SEPTIC SYSTEM FOR EXISTING HOUSE

LOCUS: 6 GROVE ROAD, RYE, NH

OWNER: JAMES PIPER, 6 GROVE ROAD, RYE, NH 03870

APPLICANT: ANNE W. BIALOBRZESKI
247 LANDING ROAD
HAMPTON, N.H. 03842
DESIGNER PERMIT #348

NEW HAMPSHIRE Designer of Subsurface Disposal Systems ★★★ Anne W. Bialobrzeski No. 348 Water Supply & Pollution Control

DATE: 11/30/84

APPROVAL: 117577

23